

# FREEDOM ★ 38



### Specifications

LOA — 37'11"  
LWL — 30'7½"  
Beam — 12'6"  
Lead Ballast — Wing 6,180 lbs.  
                  Shoal 6,500 lbs.  
                  Deep 5,530 lbs.  
Mast Height Above Water — 55'6"

Sail Area — Main 490 sq. ft.  
                  Jib 195 sq. ft.  
Draft — Wing 4'0"  
                  Shoal 4'6"  
                  Deep 6'0"  
Displacement — Wing 14,050  
                  Shoal 14,370  
                  Deep 13,400



## STANDARD EQUIPMENT

### Hull & Deck

ABS Classified Construction.

Lloyd's approved Baltek Contourkore end grained balsa laminate construction using biaxial and unidirectional glass roving with interplastic vinyl ester resin on the outer hull layer for optimum blistering resistance.

Molded fiberglass rubrail.

Lead & Antimony fixed 5530 lb., 6'0" fin keel bolted and bonded to a deep molded stub.

White, Ivory, Smoke White or Seattle Gray hull with single boot stripe.

White smooth surfaces on deck with contrasting nonskid.

Hull to deck joint bonded with 3M 5200 and bolted on 6" centers then covered with clear anodized aluminum toe rail with mooring and docking fairleads.

Large lazarette locker to port in cockpit.

Propane locker to port with one 6 lb. aluminum bottle vented overboard.

Solid GRP transverse glass supports located over keel.

### Propulsion & Steering

Yanmar 3GM-30F 27 HP diesel engine with fresh water cooling, water strainer and flexible engine mounts for quiet operation.

Lighted engine instrument panel in cockpit with LED warning lights for oil pressure and water temperature.

Edson 32" S.S. destroyer wheel on binnacle with 5" compass, brake, pedestal guard and pedestal mounted controls.

Aluminum fuel tank with inspection port and manual gauge located under quarter berth.

2 blade fixed prop with 1" Aquamet 22" stainless shaft. Aluminum emergency tiller.

### Plumbing

All marlon seacocks with double clamped hoses below W/L.

Hot & cold pressure water to galley and head.

6 gallon S.S. hot water heater.

Electric shower sump pump with automatic float switch.

Manually operated bilge pump in cockpit.

64 gallon molded water tank under starboard settee.

1 Raritan PH-2 head with 12 gallon holding tank.

Overboard discharge with Y-valve for holding tank.

Combination head sink faucet and shower unit.

Electric bilge pump with capacity rating of 2000 GPH.

### Deck Hardware

2 Bariat 27STC 2 speed winches.

Stainless welded double bow pulpit reinforced for gun mount.

Stern rail with hinged upper tier for easy access from swim platform.

Transom steps with teak treads lead down on swim platform w/custom folding swim ladder.

10" cleat located at bow, and 8" cleats aft and midship.

Three Lewmar hatches located as follows: Fwd cabin - large trapezoidal, head - 10x10, main cabin - 19 3/4x19 3/4.

Four large fixed port lights in main salon.

Seven stainless steel opening ports with screens.

Lexan companionway slider with aluminum rail and lexan drop board with lockable hasp.

2- 10" winch handles.

Harken mainsheet traveller with control system.

Lifeline gates port and starboard with Gibb hooks.

Double white PVC coated lifelines.

Deck drains with discharge below waterline.

### Electrical

12 brass swivel and R/W domelights.

Three 90 amp batteries. — 55 amp alternator.

110 volt shorepower with 3 GFI protected outlets and 50' cord.

40 amp Pro Mariner stainless steel battery charger, where indicated.

Navigation lights; anchor, steaming, running lights.

All large masses lighting protected with grounds.

Propane electric solenoid with remote switch at main distribution panel.

Install coaxial cable in mast for VHF radio.

### Galley

New 3 burner Force 10 stove with oven and broiler.

Hot and cold pressure faucet with mixing valve.

Larger dry goods storage cabinet with black plexi sliders.

Large storage bin forward of stove with counter lid and recessed pull ring.

Trash pass-through to basket in lazarette.


Plate, bowl, glass and cup storage cabinet.

Utensil drawers.

Large storage compartment under sink.

Pot and pan storage located beneath stove.

7.5 cu. ft. ice box.

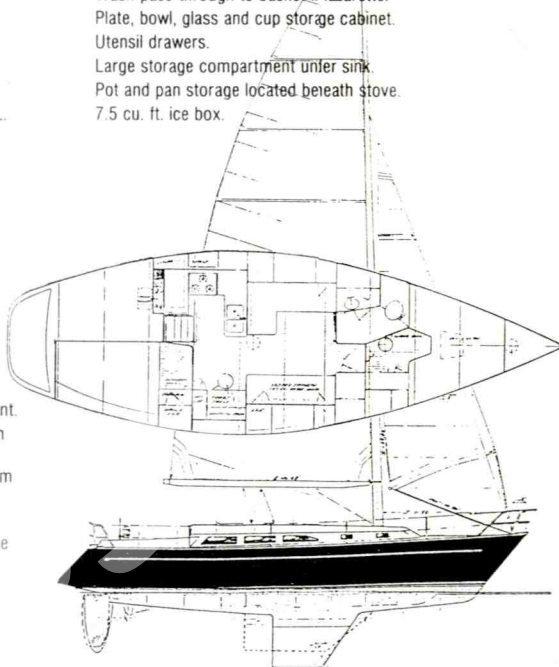

### Spars & Rigging

Custom carbon fiber free standing spar.

Complete running rigging including: Main halyard, jib halyard, 2 reefs, topping lift, lazy jacks and headstay, main sheet and jib sheet.

Main boom with reefing gear and adjustable outhaul car.

Rigid boom vang.

### Interior

Teak and holly sole with 2 coats of varnish.

Choice of interior wood - Ash, Cherry or Teak.

Cold molded alternating wood door jams.

Choice of Scotchguard heavy duty fabrics on stateroom berths and main cabin settees and main cabin pleated shades.

Solid wood frame doors.

Cold molded alternating wood risers.

Handcrafted wooden drawers.

Easy hook positive catch door latches on all cabinet doors.

All bulkheads sawn Grade AA matched grain woods.

### Forward Cabin

6'1" headroom.

Ash battens cover hull sides.

Bureau to stbd provides two lockers, hanging locker, two drawers and a bin.

V-berth with filler cushion.

Private access to head by sliding door.

Access to anchor locker from forward cabin.

### Head

Head to port with storage cabinet above and below vanity.

Head faucet and shower combo with shower curtain to pull across vanity to keep dry.

### Main Cabin

L-shaped settee to port with storage behind back rest and beneath settee.

Dinette conversion to double berth.

Full length settee to starboard with storage behind back rest.

New contoured cushion design.

Cabinets with book shelves port & starboard.

Large table which folds up against bulkhead with storage rack behind.

### Nav Station

28" x 31" chart table with chart storage beneath.

Black instrument mounting panel.

Large wet locker located next to nav station.

### Aft Cabin

Large quarter berth with 6'6" length and 5' width.

Opening port looking into cabin.

Hanging locker and two drawer storage bureau.

Shelf located on after side of berth.

### Engine Room

Large removable panel located on forward side of engine.

Access to aft end of engine through lazarette.

Engine room sound insulation with 1 lb./sq. ft., lead sandwiched between two 1/2" pieces of foam.

### Miscellaneous

98690 Extra aluminum propane tank.

98691 Steel Cradle

98692 3 blade max prop in lieu of standard.

98693 Cockpit cushions - 2" foam, white vinyl covered.

98694 Cockpit dodger - specify color.

98695 Elk hide covered 40" wheel in lieu of standard.

98696 Cockpit dodger with handrail - specify color

98697 2 blade max prop in lieu of standard.

\*SPECIFICATIONS, OPTIONS SUBJECT TO CHANGE WITHOUT NOTICE

Specifications are based on the latest information available at time of publication approval. The right is reserved to make changes at any time, without notice, in specifications, materials, colors, equipment and models or to discontinue models.

## OPTIONS

98610 Custom Hull Color - Awlgrip

98611 Double Boot Top

98614 Shoal Draft Wing Keel

98621 Shoal Keel Model

## Deck

98632 Spinnaker gun mount package: includes reinforced pulpit, spinnaker pole, deck hardware, sheets and halyards.

98633 Micro 4" S.S. solar vent installed on midships hatch.

98635 Cast aluminum opening port in aft stateroom hull.

98636 Opening port into aft cabin from cabin house aft end.

98637 Opening port in galley.

98639 Teak dorade: upgrade of basic dorade using teak box and chrome cowl vent.

98601 Basic dorade: with 3" plastic cowl vent. Package to include interior trim and screen capable of being closed from inside boat.

## Interior

98641 Cabinet at foot of quarter berth in lieu of std. shelf.

98642 Shelves in v-berth.

98644 Built in microwave oven in galley aft of ice box wired to electrical panel with designated breaker.

98645 Varnish interior.

98646 ULTRASUEDE fabric in main cabin with standard fabric throughout the rest of boat.

## Electronics/Electrical

98653 Stereo cassette with AM/FM radio installed with speakers port and starboard.

98654 Electric fan, specify cabin: aft, main, forward.

98656 Foredeck flood light.

## Mechanical/Plumbing

98661 Foot pump for sea water at galley.

98662 12 volt refrigeration - Adler Barbour Cold Machine.

98664 Seagull IV purification system.

